


# WP30F IP67 IK10

## PRESSURE PROOF LINEAR LUMINAIRE

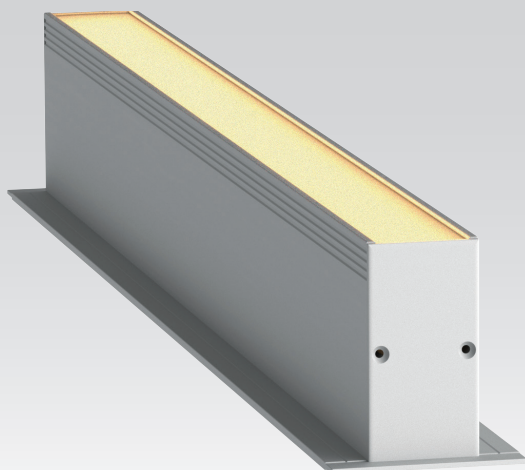

### AVAILABLE OPTIONS


#### COLOUR OPTIONS

SILVER ANODIZED




#### CCT OPTIONS

SINGLE CCT




tuneWHITE




RGBW



#### WIRE END & EXIT CONFIGURATIONS OPTIONS



Single Wire End, Rear Exit




Double Wire End, Rear Exit

## Pressure Proof Luminaire\_Facade Lighting


Profile Type	30.6mm width aluminium linear profile
Profile Finishing	Silver Anodised
Cover	Diffused
Light Uniformity	Dot-less
Mounting	Recessed Trim, Recessed Trimless
Beam Angle	115°
Power Options	Single CCT - 20W/m, 15W/m, 10W/m, 5W/m tuneWHITE - 15W/m per Channel, 10W/m per Channel, 5W/m per Channel RGBW - 20W/m, 15W/m, 10W/m, 5W/m
CRI	ProART (CRI~95) *Ra>90, R9>50
SDCM	3 step MacAdam ellipse binning
Lifetime	Up to 50,000 hours L80 lamp life at Ta = 25°C
Voltage	24V DC
Maximum Power	20W/m
Length Options	CCT: 508mm, 1008mm, 1508mm, 2008mm TW/RGBW: 512mm, 1012mm, 1512mm, 2012mm
Operating Temperature	Ta (min) = -20°C, Ta (max) = +50°C
Wire Connection	Supplied with insulated IP67 wires and connector at 200mm length
IP Rating	IP67
IK Rating	IK10 (Can withstand 5kg of free fall object dropping from 0.4m height)
Profile LOR	47% (Frosted diffuser)

### DIMENSIONS (MM)

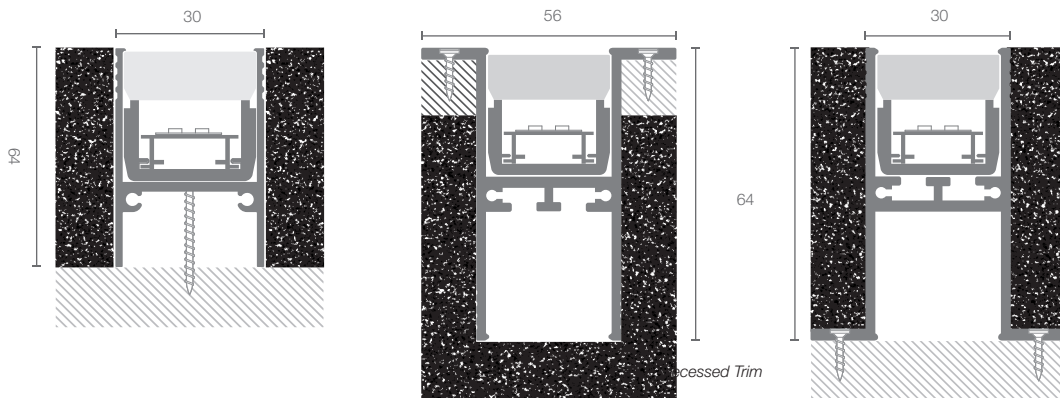

Recessed Trimless

### PHOTOMETRICS



SPECIFICATIONS

• Single CCT

CCT	Efficacy (lm/W)	Luminous Flux per meter (lm/m)			
		20W/m	15W/m	10W/m	5W/m
2400K	42.8	857	642	428	214
2700K	49.8	996	747	498	249
3000K					
3500K					
4000K	52.3	1046	784	523	261
5000K					
Correction Factor		1.00	0.75	0.50	0.25

• tuneWHITE 1800K - 3100K

CCT	Efficacy (lm/W)	Luminous Flux per meter (lm/m)		
		15W/m/Ch	10W/m/Ch	5W/m/Ch
1800K	37.8	568	380	187
3100K	49.8	747	500	247
Correction Factor		1.00	0.67	0.33

• tuneWHITE 1800K - 4000K

CCT	Efficacy (lm/W)	Luminous Flux per meter (lm/m)		
		15W/m/Ch	10W/m/Ch	5W/m/Ch
1800K	40.3	604	405	199
4000K	53.0	795	533	262
Correction Factor		1.00	0.67	0.33

• tuneWHITE 2700K - 6500K

CCT	Efficacy (lm/W)	Luminous Flux per meter (lm/m)		
		15W/m/Ch	10W/m/Ch	5W/m/Ch
2700K	49.8	747	500	247
6500K	52.3	784	526	259
Correction Factor		1.00	0.67	0.33

• RGBW

CCT	Efficacy (lm/W)	Luminous Flux per meter (lm/m)				RGB Wavelength (nm) / White CCT
		20W/m/Ch	15W/m/Ch	10W/m/Ch	5W/m/Ch	
Red	23.5	79	59	40	20	620 - 630
		(@3.36W)	(@2.52W)	(@1.68W)	(@0.84W)	
Green	35.7	170	128	85	43	515 - 525
		(@4.76W)	(@3.57W)	(@2.38W)	(@1.19W)	
Blue	9.5	45	34	23	11	460 - 470
		(@4.76W)	(@3.57W)	(@2.38W)	(@1.19W)	
White	55.6	396	297	198	99	3000K 6500K
		(@7.12W)	(@5.34W)	(@3.56W)	(@1.78W)	
Correction Factor		1.00	0.75	0.50	0.25	

Pressure Proof Luminaire\_Facade Lighting

ORDERING MATRIX

Profile	Finishing		Mounting		Cover		Length		LED Module Power & CCT				Wire End & Exit Configuration		Ingress Protection																													
WP30F	SL	Silver Anodised	T	Trim	D	Diffused	508	508mm	Single CCT	20	20W/m	24	2400K	SR	Single Wire End, Rear Exit	IP67	IP67																											
				X			Trimless	1008		1008mm	15	15W/m	27					2700K																										
			512	512mm			tuneWHITE	15PC		15W/m/Ch	TW1831	tuneWHITE 1800K-3100K	20	20W/m	RGBW30			RGBW(3000K)	5	5W/m	30	3000K																						
																							1012	1012mm	10PC	10W/m/Ch	TW2765	tuneWHITE 2700K-6500K	15	15W/m	RGBW60	RGBW(6000K)	10	10W/m	35	3500K								
																																					1512	1512mm	5PC	5W/m/Ch			40	4000K

Example: WP30F-SL-X-D-1008-5-30-SR-IP67  
 WP30F Profile, Silver Anodised, Trimless, Diffused cover, 1008mm, with FM6 - 5W/m, 3000K, Single Wire End at Rear Exit, IP67, Including 2 x End Cap