


WL60G **IP66 IK10**

LINEAR GRAZER LUMINAIRE

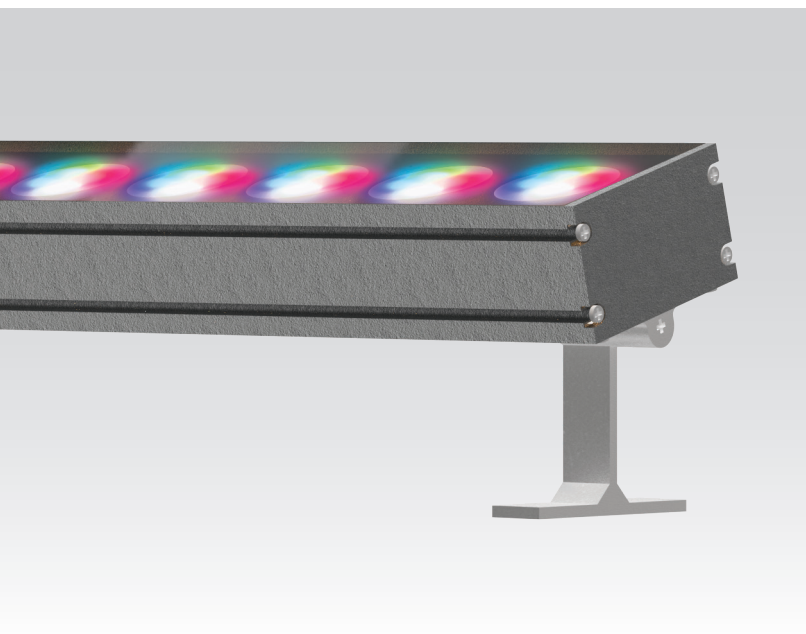


AVAILABLE OPTIONS	
COLOUR OPTIONS	<p>MATT GREY</p>
CCT OPTIONS	<p>SINGLE CCT</p> <p>2400K 2700K 3000K 3500K 4000K 5000K</p> <p>ProART </p> <p>tuneWHITE</p> <p>1800K 3100K 1800K 4000K 2700K 6500K</p> <p>tuneWHITE </p> <p>RGBW</p> <p>W = 3000K W = 6000K</p> <p>RGBW </p>
WIRE END & EXIT CONFIGURATIONS OPTIONS	<p>Single Wire End, Rear Exit</p> <p>Double Wire End, Rear Exit</p>


Grazer/ Wallwash Luminaire_Facade Lighting

Profile Type	60mm width 6063 aluminium linear profile
Profile Finishing	Powder coating
Cover	Clear
Mounting	Adjustable mounting bracket
Beam Angle	10° / 30° / 80° / 12°x45°
Compatible LED Module	- (non modular)
CRI	ProART (CRI~95)
SDCM	3 step MacAdam ellipse binning
Lifetime	Up to 50,000 hours L80 lamp life at Ta = 25°C
Voltage	24V DC
Maximum Power	72W/m
Length Options	300mm, 500mm, 1000mm
Operating Temperature	Ta (min) = -35°C, Ta (max) = +60°C
Wire Connection	Supplied with insulated IP65 wires and connector at 150mm length
IP Rating	IP66
IK Rating	IK10

DIMENSIONS (MM)

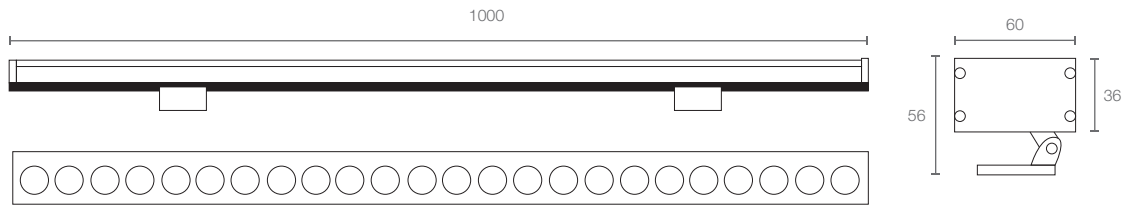

PHOTOMETRICS

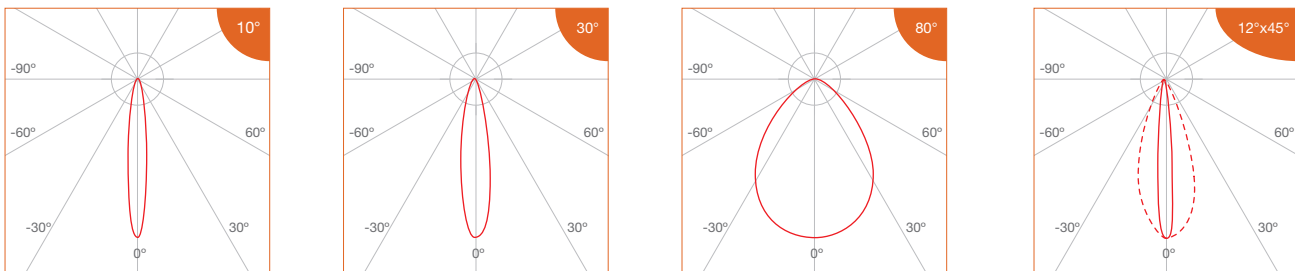

Grazer/Wallwash Luminaire_Facade Lighting

SPECIFICATIONS

- Single CCT

CCT	Efficacy (lm/W)	Luminous Flux per meter (lm/m)
		72W/m
2400K	59.2	4259
2700K		4952
3000K		
3500K	72.0	5200
4000K		
5000K		

- tuneWHITE 1800K - 3100K

CCT	Efficacy (lm/W)	Luminous Flux per meter (lm/m)
		72W/m/Ch
1800K	376.4	3764
3100K	495.2	4952
Correction Factor		1.00

- tuneWHITE 1800K - 4000K

CCT	Efficacy (lm/W)	Luminous Flux per meter (lm/m)
		72W/m/Ch
1800K	139.0	1390
4000K	182.9	1829
Correction Factor		1.00

- tuneWHITE 2700K - 6500K

CCT	Efficacy (lm/W)	Luminous Flux per meter (lm/m)
		72W/m/Ch
2700K	495.2	4952
6500K	520.0	5200
Correction Factor		1.00

- RGBW

CCT	Efficacy (lm/W)	Luminous Flux per meter (lm/m)	RGB Wavelength (nm) / White CCT
		72W/m	
Red	176.7	357	620 - 630
		(@12.10W)	
Green	268.7	769	515 - 525
		(@17.14W)	
Blue	71.8	205	460 - 470
		(@17.14W)	
White	419.0	1789	3000K 6500K
		(@25.63W)	

ORDERING MATRIX

Profile	Finishing		Cover		Beam Angle		Length		Accessories		LED Module Power & CCT				Wire End & Exit Configuration		Ingress Protection			
WL60G	GR	Matt Grey	C	Clear	10	10°	300	300mm	N	None	72	72W/m	24	2400K	SR	Single Wire End, Rear Exit	IP66	IP66		
					30	30°	500	500mm	AGB	Anti-glare Baffle			27	2700K					DR	Double Wire End, Rear Exit
					80	80°	1000	1000mm	AGL	Anti-glare Louvre			30	3000K						
					12x45	12°x45°	35	3500K												
							40	4000K												
							50	5000K												
							tuneWHITE	72PC	72W/m/Ch	TW1831			tuneWHITE 1800K-3100K							
										TW2765			tuneWHITE 2700K-6500K							
					RGBW	RGBW30	RGBW(3000K)													
						RGBW60	RGBW(6000K)													

Example: WL60G-GR-C-30-1000-AGB-72-30-SR-IP66
 WL60 Grazer Profile, Matt Grey, Clear cover, Beam angle 30°, 1000mm, Anti-glare Baffle, 72W/m, 3000K, Single Wire End at Rear Exit, IP66, Including 2 x End Cap