



DIM-ROTA

ROTARY DIMMER MODULE FOR LED LOADS

DIM-ROTA dimmer modules dim LED loads perfectly from 100% to as low as 3% with smooth and pleasant curve to eye response.

FEATURES

- Modular dimming mechanism fit standard wall plate
- Optimised dimming performance for LED and eye response
- Built-in with short-circuit, open circuit, over-current and over temperature
- 2-wire design, no neutral wire required


TECHNOLOGY BENEFITS

- Optimised dimming performance to LED loads
- Quick installation, match most face plate in the markets

APPLICATION

- Hotel and galleries
- Offices
- Retail, fashion stores and showroom
- Residential

DIMENSIONS

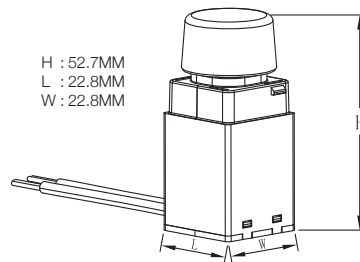

SYSTEM SPECIFICATIONS

Model	Watts	Mode	Dimming Range
DIM-ROTA.35	10 - 350	Trailing Edge	100% - 3%


the table information is at nominal values with accuracy of +/-7%

ORDERING MATRIX

Dimmer Module			Accessories	
Type	Watts		Face Plate	
DIM-ROTA	35	350W	-	MODULE ONLY

example: DIM-ROTA.350

DETAILS SPECIFICATION

Family Type	DIM-ROTA
Mains voltage	220-240 V ac / 50Hz
Colour options	White
Installation	Compatible with most wall mounted face plates
Dimming	Phase dimmer - Trailing edge
Mains connection	2x insulated wires
Materials	Plastic
Fire safety	Glow wire test 850C UL94V-0 WW-1
Flammability mark	F
IP code	IP 20
Standards	AZ/NZS 3100 AS/NZS 3133 IEC 60669-2-1
Regulatory markings	CE CB RCM
Weight	25g
Wiring Diagram	
Warning	DO NOT wires two or more dimmer to control the same load

Data will be subject to change without notice.